

Hammond Watertight Polycarbonate - 1554/5 Series 2 Lids - Flat, Recessed, Clear & Smoked

Rugged electronic or electrical watertight & weather resistant enclosure


- Light grey (RAL 7035) polycarbonate material carries a rating of UL94 5V and is recommended for outdoor use. Smoked Lid, Clear flat polycarbonate lid "2CL" series for use with sensors and photovoltaics.
- Lid is secured with self captivating M4 stainless machine screws into integral stainless steel bushings to avoid corrosion with dissimilar metals.
- Gasketed lid with high temperature UL listed silicon gasket material and 2 piece tongue & groove' construction to protect against access of oil, dust and water.
- Meets IP 66 & NEMA 4, 4X, 12 & 13 ratings
- Vertical card guides, integral PCB mounts and DIN rail mounting tabs moulded in except for the smallest sizes B2GY & C2GY / B2GYCL & C2GYCL of both series.
- Options vary with size. Refer to photo tables on www.hammondmfg.com for internal views of each size, also for detailed drawings and CAD files.
- Gear Plates and mounting feet available.




26-1554 '2' Series Flat lid, clear and smoked lid options



16-1554 '2CL' Series

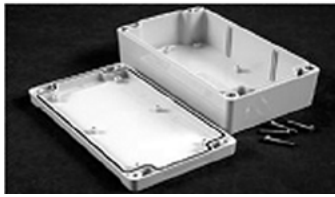

26-1555 '2' Series Recessed lid for membrane keypad & PCB spacers in lid

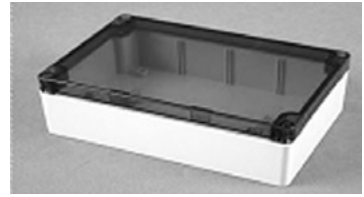

26-1554 '2SL' Series

Part Number - Polycarbonate				Dimensions (mm)		
Flat Lid	Flat Clear Lid	Flat Smoked Lid	Recessed Lid	Length	Width	Height (with lid)
26-1554B2GY	26-1554B2GYCL	26-1554B2GYSL	26-1555B2GY	65	65	40
26-1554E2GY	26-1554E2GYCL	26-1554E2GYSL	26-1555E2GY	90	90	60
26-1554C2GY	26-1554C2GYCL	26-1554C2GYSL	26-1555C2GY	120	65	40
26-1554D2GY	26-1554D2GYCL	26-1554D2GYSL	26-1555D2GY	120	65	60
26-1554F2GY	26-1554F2GYCL	26-1554F2GYSL	26-1555F2GY	120	90	60
26-1554G2GY	26-1554G2GYCL	26-1554G2GYSL	26-1555G2GY	120	90	80
26-1554N2GY	26-1554N2GYCL	26-1554N2GYSL	26-1555N2GY	120	120	60
26-1554P2GY	26-1554P2GYCL	26-1554P2GYSL	26-1555P2GY	120	120	80
26-1554J2GY	26-1554J2GYCL	26-1554J2GYSL	26-1555J2GY	160	90	60
26-1554K2GY	26-1554K2GYCL	26-1554K2GYSL	26-1555K2GY	160	90	90
26-1554R2GY	26-1554R2GYCL	26-1554R2GYSL	26-1555R2GY	160	160	60
26-1554S2GY	26-1554S2GYCL	26-1554S2GYSL	26-1555S2GY	160	160	90
26-1554H2GY	26-1554H2GYCL	26-1554H2GYSL	26-1555H2GY	180	120	60
26-1554T2GY	26-1554T2GYCL	26-1554T2GYSL	26-1555T2GY	180	120	90
26-1554U2GY	26-1554U2GYCL	26-1554U2GYSL	26-1555U2GY	200	120	90
26-1554V2GY	26-1554V2GYCL	26-1554V2GYSL	26-1555V2GY	240	160	90