


Hammond Watertight Diecast Aluminium -1590 W

Rugged, diecast aluminium alloy . Tough yet easy to machine. Meets IP65.

- Lap joint construction with a factory poured silicone rubber gasket around the perimeter provides protection against dust & splashing water.
- Silicone gasket remains flexible from -62 to $+232^{\circ}\text{C}$
- Assembled with 6-32 x 1/2" stainless steel colour matched machine screws & neoprene 'O' rings.
- Painted version is painted with tough polyester powder paint for a lasting finish.

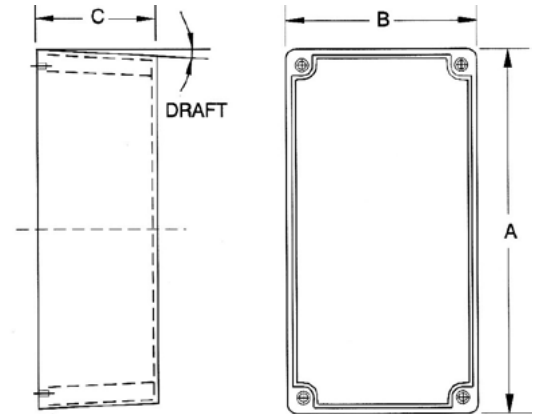

Approx Draft = $1^{\circ}15'$ to 2°

For detailed drawings and CAD files visit www.hammondmfg.com

Part Number		Length A	Width B	Height (no lid) C	Height With Lid
Unpainted	Black				
26-1590WLLB	26-1590WLLBBK	50	50	21	25
26-1590WLB	26-1590WLBK	51	51	27	31
26-1590WH	26-1590WHBK	52.5	38	27	31
26-1590WY	26-1590WYBK	92	92	38	42
26-1590WA	26-1590WABK	93	39	27	31
26-1590WG	26-1590WGBK	100	50	21	25
26-1590WS	26-1590WSBK	111	82	40	44
26-1590WB	26-1590WBBK	112	60	27	31
26-1590WBB	26-1590WBBBK	119	94	30	34
26-1590WQ	26-1590WQBK	120	120	28	32
26-1590WU	26-1590WUBK	120	120	55	59
26-1590WV	26-1590WVBK	120	120	90	94
26-1590WC	26-1590WCBK	120	94	53	56.5
26-1590WT	26-1590WTBK	121	80	55	59
26-1590WN1	26-1590WN1BK	121.1	66	35.3	39.3
26-1590WKK	26-1590WKKBK	125	125	53	57
26-1590WK	26-1590WKBK	125	125	75	79
26-1590WJ	26-1590WJBK	145	95	45	49
26-1590WP1	26-1590WP1BK	153	82	46	50
26-1590WDD	26-1590WDDBK	188	119.5	33	37
26-1590WD	26-1590WDBK	188	120	52	56
26-1590WE	26-1590WEBK	188	120	78	82
26-1590WF	26-1590WFBK	188	188	63	67
26-1590WR1	26-1590WR1BK	192	111	57	61