



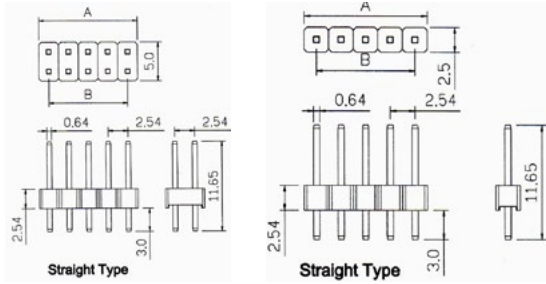


Pin Headers 2.54mm pitch



- Current Rating: 1A
- Contacts : Gold Plated Brass
- Housing: PBT 30% Glass UL94VO

Part No 32-112 xx S/D V/R 2.54 mm Pitch
 xx = No of Contacts
 V = Straight
 R = Right Angle
 S = Single Row 2 to 40 way
 D = Double Row 4 to 80 way




Mini Jumpers 2.54mm pitch

- Current Rating: 1A
- Gold Plated Phosphor Bronze Contacts
- Housing: PBT 30% Glass UL94VO
- Insulation Resistance : 1000Mohm min. at 500V



Part No 32-116BG1






Part No 32-116DG1

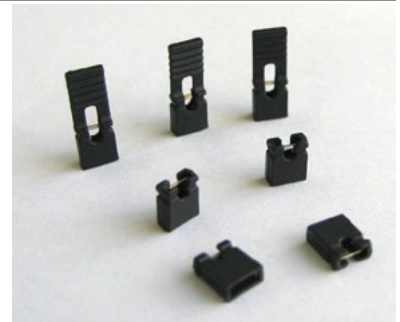

PCB Socket 2.54mm pitch

- Gold Plated Phosphor Bronze Contacts.
- Current Rating: 1A
- Housing PBT 30% Glass UL94VO.
- Dielectric Strength: 500VAC for 1 min.
- Operating Temp. -55°C to +105°C.

Part No 32-114 xx S/D V/R 2.54 mm Pitch
 xx = No of Contacts
 V = Straight
 R = Right Angle
 S = Single Row 2 to 40 way
 D = Double Row 4 to 80 way

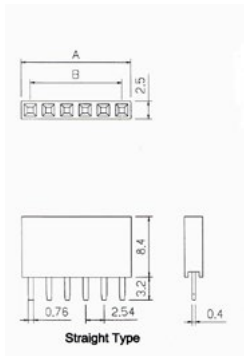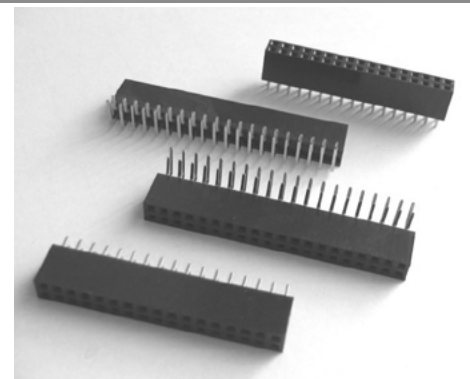

Single Row

Double Row