

Min. Toggle Switches - Panel Mount

Series 100

Contact Rating (UL/CSA): Silver
 2A @ 250VAC or 5A @ 28VDC
 Contact Res.: 10mΩ max. initial @ 2-4VDC
 Insulation Resistance: 1,000 MΩ
 Dielectric Strength: 1,000V RMS @ sea level
 Operating Temp.: -30 °C to 85 °C
 Electrical Life: 50,000 make & break cycles at full load.

Model	Switch Position		
SP1 & DP1	On	None	On
SP2 & DP2	On	None	(On)
SP3 & DP3	On	Off	On
SP4 & DP4	(On)	Off	(On)
SP5 & DP5	On	Off	(On)
Terminals	2-3,5-6	Open	2-1,5-4

(On) Momentary on

Panel Mount SPDT On/On

Refer table for other models

Solder Terminals Part No.
41-T100SP1T1M1

PCB Terminals Part No.
41-T100SP1T1M2





Panel Mount DPDT On/On

Refer table for other models

Solder Terminals Part No.
41-T100DP1T1M1


PCB Terminals Part No.
41-T100DP1T1M2

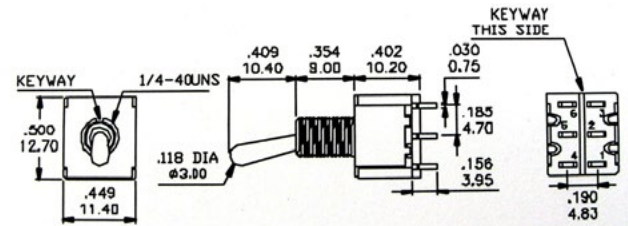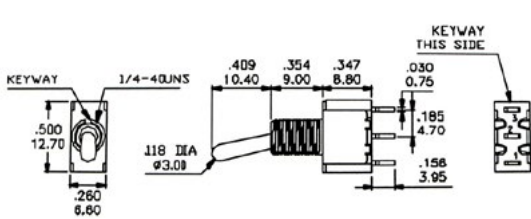

Min. Toggle Switches - Splashproof Models


DPDT On-Off-Mom.

Solder Terminals Part No.
41-T100DP5B9E



Rubber Boot, Nut & 'O' Ring for T100 Series Panel Mount Toggle Switches Part No.


41-T100E1A

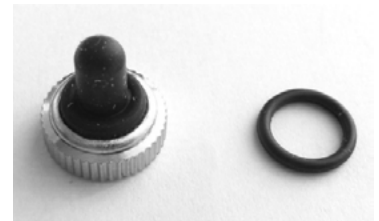

Min. Toggle Switches - PCB Mounting Right Angle

SPDT On/On

Part No.
41-T100SP1T1M7

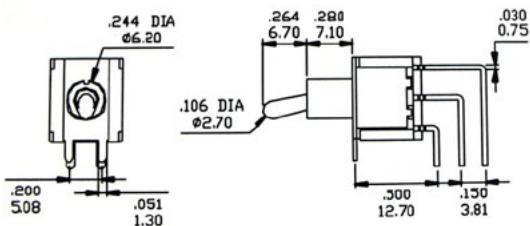

DPDT On/On

Part No.
41-T100DP1T1M7

